
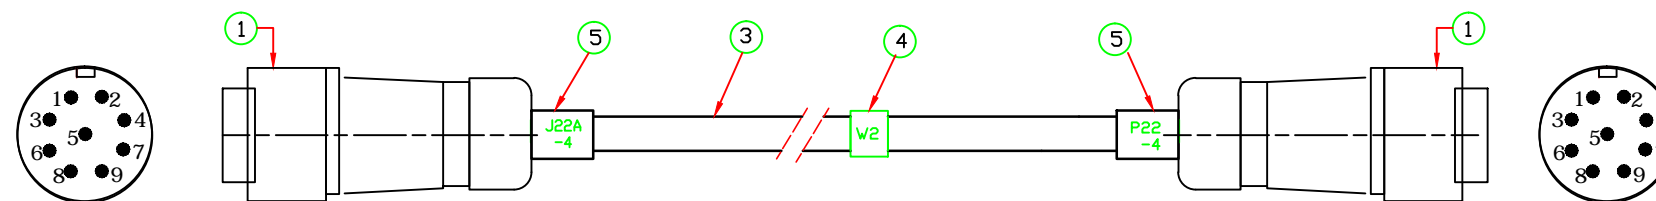


### Wiring Diagram

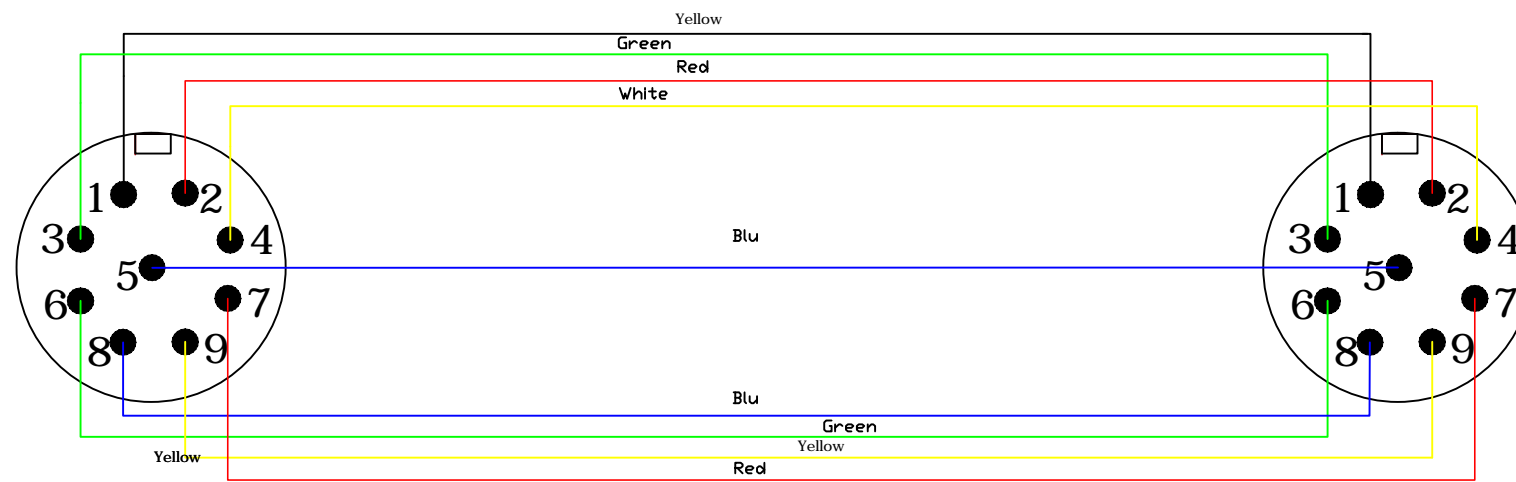

NOTE:

Qty	Description	Item
2	SP2110/P9 , TME, Male contacts	1
-	-----	-
1	Cable FRDR 9x1 300 V CEI 20-22-II	3
1	WH Heat shrink sleeving Ø12, L = 30	4
2	RD Heat shrink sleeving Ø12, L = 30	5

<b>IOLVA</b> www.iolva.it e-mail: iolva.silvano@iolva.it		DENOMINAZIONE / Title	
		CAVD interconnessione rotori	
-TUTTE LE QUOTE SONO ESPRESSE IN mm E SI INTENDONO A PEZZO FINITO -Unless otherwise specified, dimensions and tolerances - are in mm and after finish. General tolerance: ±		Rotator Azimuth / Elevation	
		MATERIALE / Material	Trattamento
FIRMA / Signature: <u>                    </u> DATA / Date: <u>                    </u> DISEGNATO / Drawn: RICCI APPROVATO / Check: <u>                    </u>	TP: <u>                    </u> TC: <u>                    </u> RG: <u>                    </u>	SCALA / Scale: <u>                    </u> TAV. / Sheet: <u>                    </u> REVISIONE: <u>                    </u>	CODICE / DWG n° 275SA-W002